



Stopfor P + M41

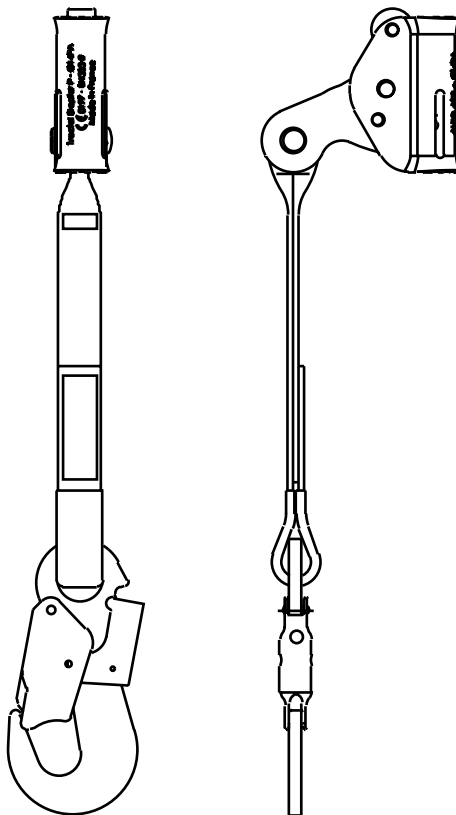

Stopfor P + M10

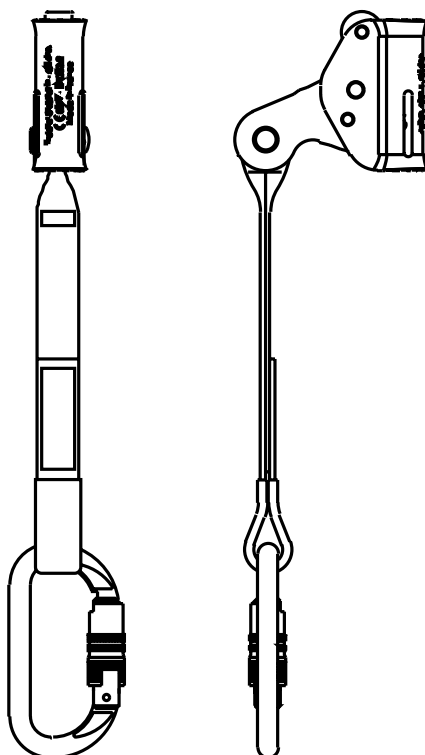

Fonction

The Stopfor P is a fall arrester including a rope anchor line. It automatically stops the fall of a user who is moving vertically.

The Stopfor P is fitted on the twisted rope at the factory, so that the rope and the fall arrester form a unit which cannot be dismantled. It is ready to use, and is designed for people who occasionally use a fall arrester on twisted rope

Description and principle of operation

The Stopfor P fall protection system consists of the following components:

- The twisted rope is a 14 mm diameter stranded rope. It is supplied in multiples of 5 m lengths up to 50 m. An eye is made at one end to attach the rope to the anchorage point and a stop splice is made in the other end.
- The Stopfor P fall arrester moves along the rope due to a slight tension, equivalent to the weight of the device, which is transmitted to the user via a webbing lanyard.


If the user falls, the operating lever tilts 45° and the jaw clamps the rope in the U-shaped groove in the housing.

The housing is made of stainless steel sheet and has two grooves which distort in the event of a fall. These grooves can therefore be used as fall indicators.

Although the Stopfor P can withstand several falls, the Stopfor P and the twisted rope must be inspected by a competent person after it has stopped a fall.

The Stopfor P is for short-term occasional use only. For longer periods of use Tractel recommends the use of the Stopfor S. This is a fall arrester which can be attached and removed from the twisted rope very easily.

The Stopfor P is used to protect persons working at height moving vertically up and down a structure.

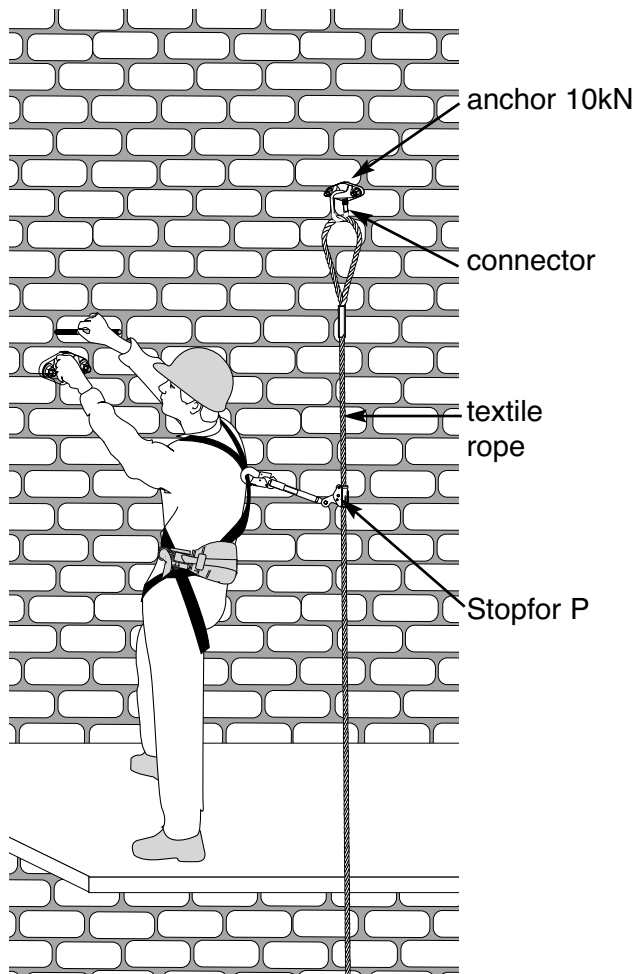

When the twisted rope becomes worn, it must be replaced by Tractel or by a competent person trained by Tractel.

Specification

Marking :

- Tractel
- Stopfor P- F 14mm PA
- CE 0197 – EN353-2
- Made in France
- The serial number and the date of manufacture

Caracteristiques

- Stainless steel, with plastic roller.
- Weight of the unit with lanyard 280 g.
- Dimensions 95 x 75 x 30 mm.
- Polyamide rope diameter 14 mm, 3 strands.
- The assessment of the conformity of the Stopfor P with directive 89/686/EEC and standard EN 353-2 has been carried out by the APAVE, under reference number 0082/352/160/03/02/0059.

Name	Data	TSA Code	Group Code
Stopfor P L0,3-M10	Webbing lanyard 0.3 m + M10	CC36468	36468
Stopfor P L0,3-M11	Webbing lanyard 0.3 m + M11	CC36478	36478
Stopfor P L0,3-M41	Webbing lanyard 0.3 m + M41	CC36488	36488